

# SEPA - TEC SEALS, J.Linder

Construction, DESIGN AND MANUFACTURING OF EVERY KIND OF MECHANICAL SEALS SINCE 1988 !


## Typ 16RO

Metalbellow Seal

After Din 24960

Till 220 °C

Alternativ to Burgmann MFL 95N

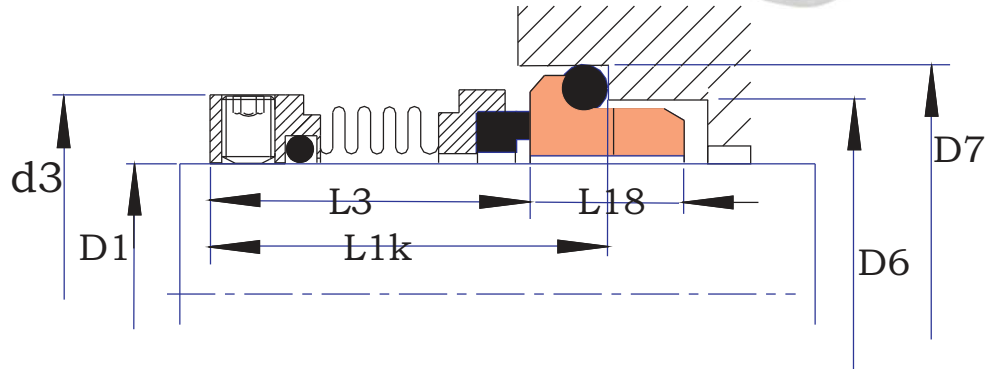

### Measures of Typ 16RO

D1	D3	d6	d7	l3	l1k	l18
14	24	21	25	30,5	35	15
16	26	23	27	29,5	35	15
18	32	27	33	30,5	37,5	15
20	34	29	35	30,5	37,5	15
22	36	31	37	30,5	37,5	15
24	39	33	39	33	40	15
25	39	34	40	33	40	15
28	42	37	43	35,5	42,5	15
30	44	39	45	35,5	42,5	15
32	46	42	48	35,5	42,5	15
33	47	42	48	35,5	42,5	15
35	49	44	50	35,5	42,5	15
38	54	49	56	37	45	16
40	56	51	58	37	45	16
43	59	54	61	37	45	16
45	61	56	63	37	45	16
48	64	59	66	37	45	16
50	66	62	70	38	47,5	17
53	69	65	73	38	47,5	17
55	71	67	75	38	47,5	17
58	78	70	78	42	52,5	18
60	80	72	80	42	52,5	18
63	83	75	83	42	52,5	18
65	85	77	85	42	52,5	18
68	87	81	90	41,5	52,5	18,5
70	90	83	92	48,5	60	19
75	99	88	97	48,5	60	19
80	104	95	105	48,5	60	19
85	109	100	110	48,5	60	19
90	114	105	115	52	65	20,5
95	119	110	120	52	65	20,5
100	124	115	125	52	65	20,5

### Operating limits:

Pressure 16 bar

Temp. till 220 °C

Speed till 20m/sek.

### Diameter :

19 - 100 mm

others on inquiry

### Materials :

AM 350

Hasteloy C4

Carbon

SIC, WC

SEPA - TEC SEALS, J.Linder, Schmiedgasse 4, 78737 Fluorn

Phone 07402 /1686, Fax 07402 / 8169

www.sepatecseals.de Mail : stseals@t-online.de