

SEPA - TEC SEALS, J.Linder

Construction, DESIGN AND MANUFACTURING OF EVERY KIND OF MECHANICAL SEALS SINCE 1988 !

SEPA TEC SEALS GLETRINGDICHTUNGEN


SEPA TEC SEALS GLETRINGDICHTUNGEN

SEPA TEC SEALS GLETRINGDICHTUNGEN

Typ A API 682 Single Cartridge



Speed : 50m/sec
 Pressure : 60 bars
 Temperature : 260°C (FFKM)
 Alternativ to Burgman LEK 777
With slotted holes or through holes

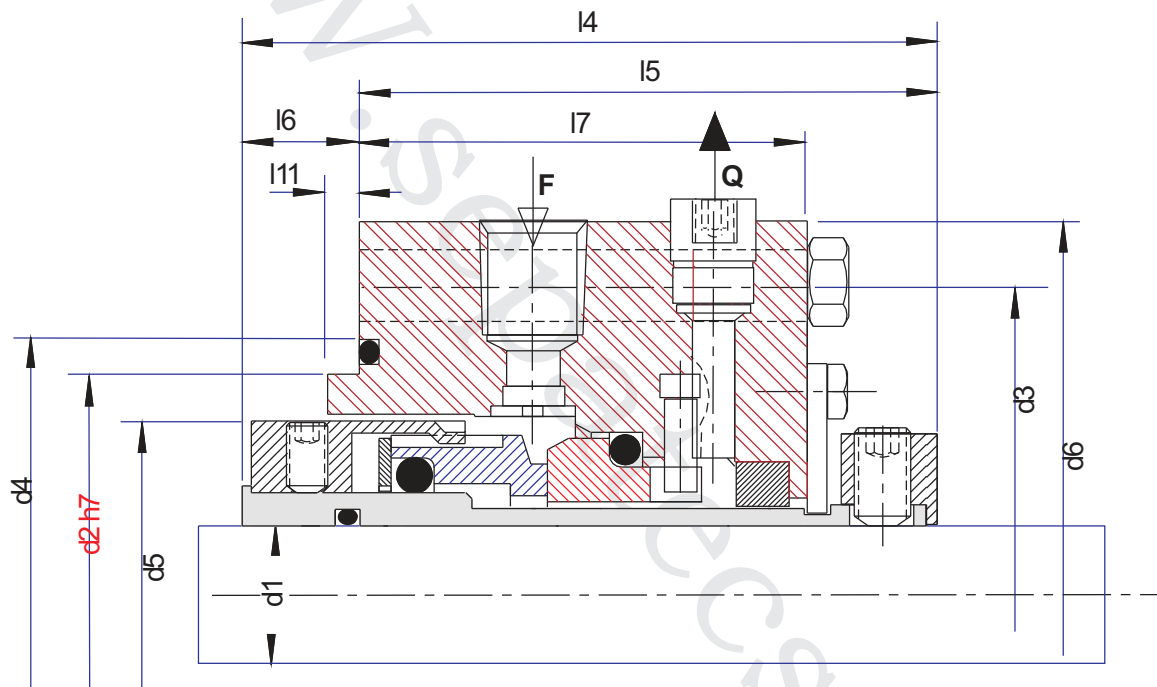

Single cartridge

API / d1	API / d2	API / d3	API / d4	d5	d6	l4	l5	l6	l7	l11	overall length
20	70	105,00	85,00	50,00	138,00	95,00	94,00	1,00	76,00	6,00	100,00
30	80	115,00	95,00	62,00	148,00	100,50	98,00	2,50	77,00	6,00	104,00
40	90	125,00	105,00	72,00	158,00	105,50	98,50	7,00	77,50	6,00	125,00
50	100	150,00	115,00	86,00	168,00	111,50	99,50	12,00	78,50	6,00	140,00
60	120	160,00	135,00	99,00	188,00	120,50	102,00	18,50	81,00	6,00	160,00
70	130	170,00	145,00	109,00	198,00	124,50	106,00	18,00	81,00	6,00	170,00
80	140	180,00	155,00	119,00	208,00	129,00	106,00	23,00	81,00	6,00	180,00
90	160	205,00	175,00	129,00	238,00	129,00	106,00	23,00	81,00	6,00	205,00
100	170	215,00	185,00	153,00	248,00	133,00	109,00	24,00	81,00	6,00	215,00
110	180	225,00	195,00	168,00	258,00	133,00	109,00	24,00	81,00	6,00	225,00