


SEPA - TEC SEALS, J.Linder

Konstruktion, Produktentwicklung, Herstellung von Gleitringdichtungen aller Art seit 1988

Typ 11-2

in Zoll und Metrisch. Alternativ zu Crane 2

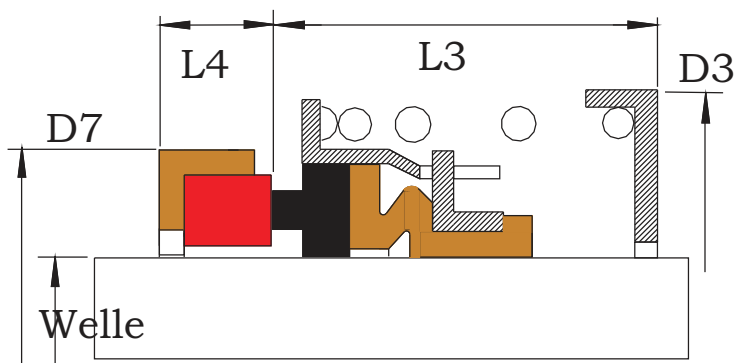

Maßtabelle Typ 11-2 mm und Zoll

Welle ZOLL	Welle	d3	L3	L4	d7	
					Amerikan	Deutsch
inch	mm	mm	mm	mm	Norm	
0,500	12	30,14	20,64	7,93	25,4	23
	14	33,32	22,23	10,28	31,75	25
0,625	16	33,32	22,23	10,28	31,75	27
	18	36,15	22,23	10,28	34,93	33
0,750	20	39,67	23,8	10,28	38,1	35
	22	39,67	23,8	10,28	38,1	37
0,875	24	45,5	25,4	11,1	41,28	39
	25	45,5	25,4	11,1	41,28	40
1,000	28	48,5	26,97	11,1	44,44	43
	30	52,37	26,97	11,1	47,63	45
1,125	32	52,37	26,97	11,1	47,63	48
	33	56	28,58	11,1	50,8	50
1,250	35	56	28,58	11,1	50,8	50
	38	56	28,58	11,1	53,98	56
1,500	40	59,2	34,93	12,7	60,38	58
	43	67	34,93	12,7	63,5	61
1,750	45	69,85	34,93	12,7	63,5	63
	48	73,03	38,1	12,7	69,85	66
1,875	50	76,2	38,1	12,7	69,85	70
	53	82,55	42,85	14,28	76,2	73
2,000	55	85,73	42,85	14,28	79,38	75
	60	88,9	46,02	14,28	82,55	80
2,125	63	92,08	46,02	14,28	85,73	85
	65	98,43	49,2	15,9	85,73	90
2,250	70	101,6	49,2	15,9	88,9	92
	73	104,78	52,37	15,9	95,25	
2,375	75	107,95	52,37	15,9	98,43	97
	80	115,8	55,55	19,84	101,6	105
2,500		119,5	55,55	19,84	104,78	
		122,22	55,55	19,84	107,95	
2,625		125,4	55,55	19,84	111,13	
	85	122,22	55,55	19,84	107,95	110
2,750	90	130,18	55,55	19,84	114,3	115
	95	133,35	55,55	19,84	117,48	120
2,875	100	141,27	58,72	19,84	123,85	125

Techn. Beschreibung

Einfach wirkende
Entlastete
Gummibalg GRD
Drehrichtungs-
unabhängig

Materialien :

1.4571 , 316, o.ä
SIC-, Carbon,
WC
FKM, EPDM,
NBR, HNBR

Einsatzdaten :

- 40°C - 160 C° (Elastomer Abh.)
- 20m/sek
- 20 Bar